


Technical Data

Standards	EN 61058 UL 1054 C. 22.2 n° 55-1986
Rating resistive and/or motor	16 (8) A - 250 V AC 1E4 12 (10) A - 250 V AC 5E4 10 A - 400 V AC 1E4
Operating temperature	T 120 / 55 °C
USA rating	20 A - 125 V AC 16 A - 250 V AC
Operating temperature	T 65 °C
Class of application	II
Degree of protection	IP 65
Mechanical life	> 300.000
Actuating force	< 15 N
Contact opening	> 3 mm
Insulating resistance	> 10 MΩ
Dielectric strength	4.000 V
Proof tracking index	PTI 250 V
Glow-wire test	850 °C
Flame resistance	UL 94-V2

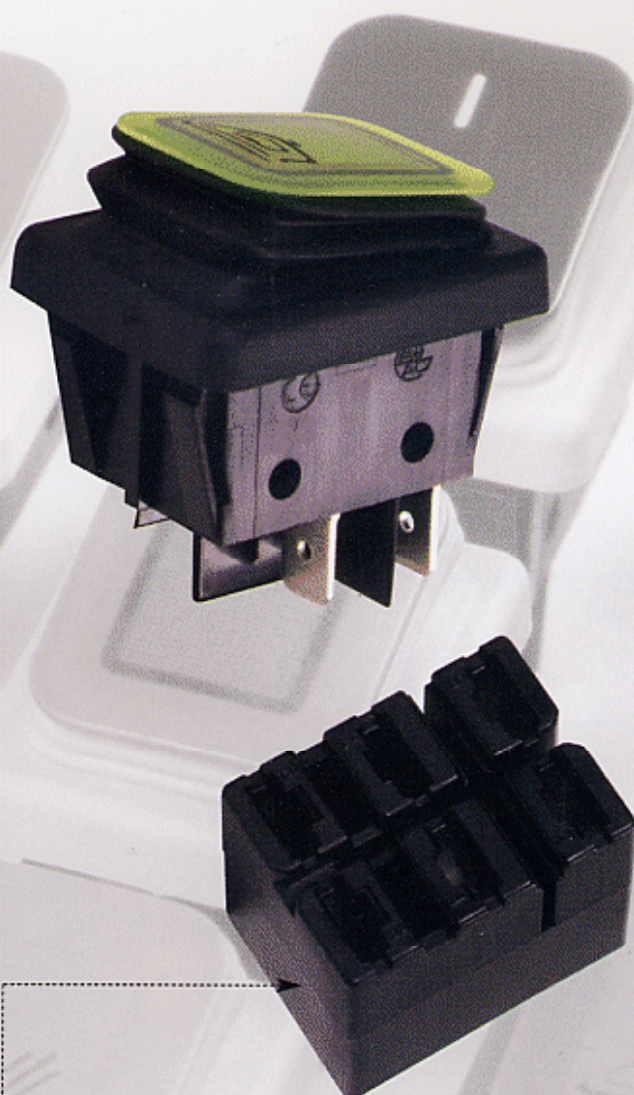

Connector for easy wiring

A specially designed connector can be used for connecting wires in the new **B4 mask** series.

This accessory makes assembly and wiring much quicker and prevents risk of error.


Rocker Switches

B 4 M A S K □ □ □ □ ? □ □ 0 0 0

106 104 178 101 159 162



172 152 171 155 154 173

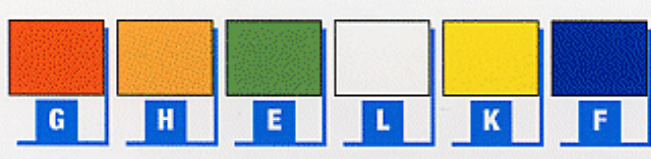

174 175 176 177



Bright Color





B 4 M A S K □ □ □ □ □ ? □ 0 0 0

01 02 03 04 05 06 07 08 09 10 14



B 4 M A S K □ □ □ □ □ □ ? 0 0 0

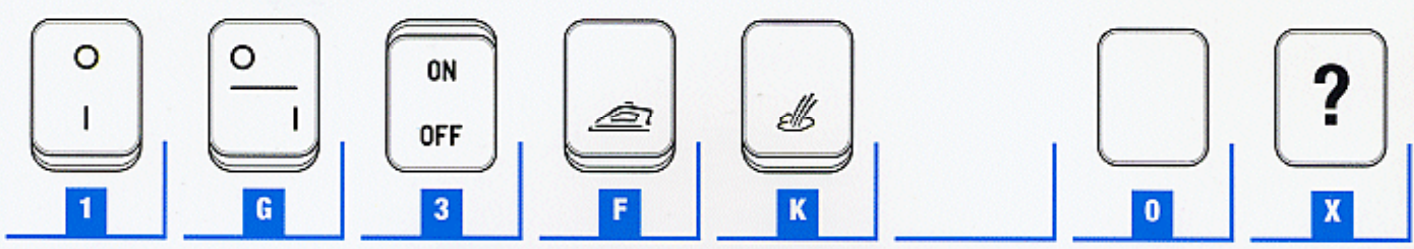



A

B

4

C

N

T

