


# FASCETTE CON FORO PER VITE SCREW MOUNTING CABLE TIES

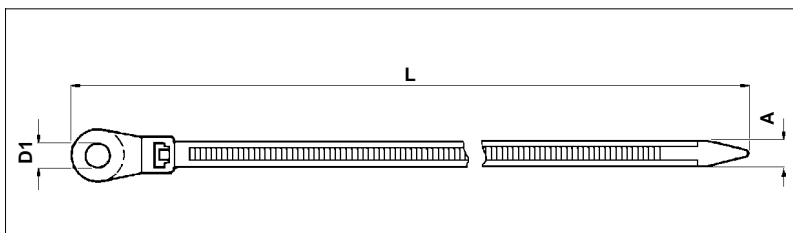

- **MATERIALE = PA 6.6**  
MATERIAL = PA 6.6
- **AUTOESTINGUENZA = V2 (UL94)**  
UL FLAMMABILITY = V2 (UL94)
- **COLORE = Naturale**  
COLOUR = Natural

## NOTE

### NOTES

**Dc = Diametro max. del cavo (mm)**

Dc = Max. diameter of the cable (mm)

**Kg = Carico minimo di tenuta (Kg)**

Kg = Min. loop tensile strenght (Kg)

CODICE P/N	DIMENSIONI SIZES			Dc	Kg	NOTE NOTES	CONF. PKG. pz. pcs.
	L	A	D1				
<b>4771 AA00 XS</b>	110	<b>2,5</b>	3,2	22	8,1		1.000
<b>2436 AA00 XS</b>	150	<b>3,6</b>	4,2	32	18,2		1.000
<b>2437 AA00 XS</b>	200	<b>4,8</b>	5,5	50	22,2		1.000
<b>4772 AA00 XS</b>	379	<b>4,8</b>	5,5	76	22,2		1.000
<b>2438 AA00 XS</b>	215	<b>7,6</b>	5,7	50	54,4		100
<b>2503 AA00 XS</b>	305	<b>7,6</b>	5,7	76	54,4		100
<b>2439 AA00 XS</b>	375	<b>7,6</b>	6,3	98	54,4		100

Tutte le quote sono in mm. / All the dimensions are in mm.