



Single Color




Product Introduction:

Skidproof Flower-lined Heat Shrink Tubing is made of high-polymer with scientific formula, via advanced technology processing. It has the advantage of environment friendly, good flexibility, skidproof, perfect appearance, fast shrinkage, and stable performance, widely used in fishing tackles, sports fittings, health equipment and commodities, etc.

Property:

- 1) Operating Temperature: -55°C ~ 105°C
- 2) Shrinking Temperature: Start at 70°C, and shrunk totally at 110°C,
- 3) Tensile Strength: 10.4Mpa; Elongatin:200%;
- 4) Shrink ratio: 2:1, longitudinal shrink ratio ≤ 8%.
- 5) Convenient: can be shrunk by oven, heat gun or hot water easily;
- 6) RoHS compliant, it's the first of its kind in China.

Color: Black, Red, Yellow, Green, Blue. (Other color available upon request.)

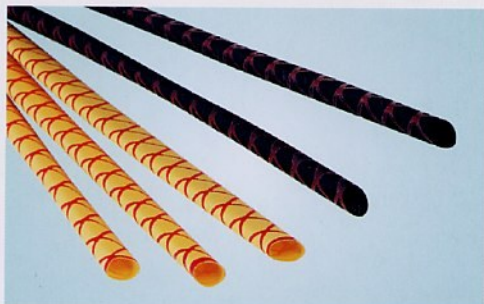


Double Color

Specification:

Size	As supplied(mm)		After recovery		Standard Packing (m/pcs)
	ID	Average Thickness	Max.ID	Average ID	
Φ 15	≥15	0.45±0.15	8	0.85±0.15	1.0
Φ 20	≥20	0.50±0.15	11	0.90±0.15	0.8/1.0/1.6
Φ 22	≥22	0.50±0.15	12.5	0.90±0.15	0.8/1.0/1.6
Φ 25	≥25	0.50±0.15	14.5	1.00±0.15	0.8/1.0/1.6
Φ 28	≥28	0.50±0.15	15.5	1.00±0.15	0.8/1.0/1.6
Φ 30	≥30	0.60±0.15	17.5	1.20±0.15	0.8/1.0/1.6
Φ 35	≥35	0.60±0.15	20	1.20±0.15	0.8/1.0/1.6
Φ 40	≥40	0.60±0.15	23	1.20±0.15	0.8/1.0/1.6
Φ 45	≥45	0.65±0.15	25	1.25±0.15	0.8/1.0/1.6
Φ 50	≥50	0.65±0.15	28	1.25±0.15	0.8/1.0/1.6

Expandable Sleeving

WSS

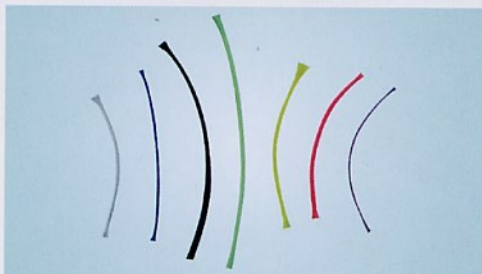

Expandable Sleeving is made of braided polyester yarn and easily slipped over your wire harness or tubing by bunching it together and then stretching it to bring it back down to size. This material is light weight and extremely flexible. Expandable sleeving is used to bundle wires, protect hoses, etc.

Material: Polyethylene Terephthlate P.E.T.

Size(mm)	Compos.nx/mm	Dia.(mm)	Max.Dia.(mm)	Package(m/reel)
3	1/0.25	3	5	1000
4	1/0.25	4	6	1000
5	1/0.25	5	7	1000
6	1/0.25	6	8	1000
	3/0.20	6	8	800
7	1/0.25	7	9	800
	3/0.20	7-8	10	500
8	1/0.25	8	10	500
	3/0.20	8	10	500
9	1/0.25	9	11	500
	3/0.20	9	11	500
10	1/0.25	10	12	500
	3/0.20	10	12	500
12	3/0.20	12	14	500
	3/0.25	12	14	500
14	3/0.20	14	16	500
	3/0.25	14	16	500
16	3/0.20	16	18	500
	3/0.25	16	18	500
18	3/0.20	18	20	400
	3/0.25	18	20	400
20	3/0.20	20	22	400
	3/0.25	20	22	400
22	3/0.20	22	24	400
	3/0.25	22	24	400
24	3/0.20	24	26	400
	3/0.25	24	26	400